


Austin Counties Spares

Oil Filter Adaptor Kit

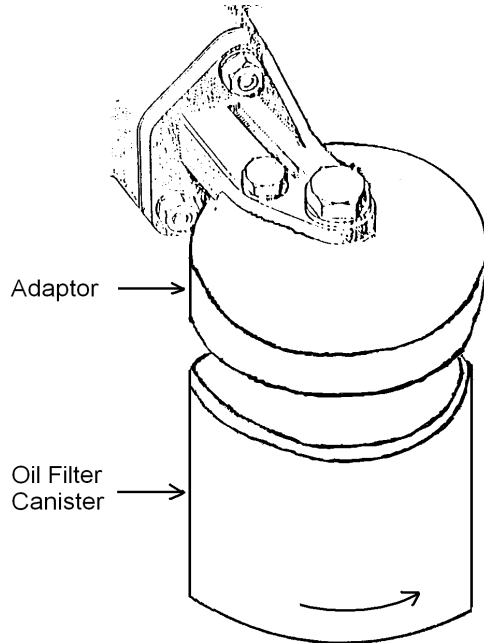

Kit Contents.

- Adaptor.
- 1/2" Fibre washer for oil union nut.
- 3/8" Fibre washer for oil union screw.
- Neoprene gasket.
- Joint washer bracket to block.

The Austin Counties Spares Oil Filter Adaptor Kit fits all A40 models. Fit to the existing oil filter bracket (Somerset & GS3 Devon) or connecting unions (Devon GS2). For the GS2 Devon you will need to secure the canister to the block.

Fitting Instructions.

- Remove the bracket from the cylinder block. Clean the oil ways in the bracket thoroughly. Refit the bracket with new joint washer supplied.
- Fit a fibre washer under the head of the nut and screw. Fit the neoprene gasket between the bracket and the adaptor.
- Screw the adaptor to the bracket and tighten the nut and screw.
- Attach a new oil filter to the bracket and ensure it is hand tightened fully against the bottom face of the adaptor making the oil filter sealing ring effective.
- Run the engine and check all oil joints for leaks.

The following modern canister type filters may be used:

Fram PH2857A

Crossland 529

Motorcraft EFL90 EFL39

T.J. 2059